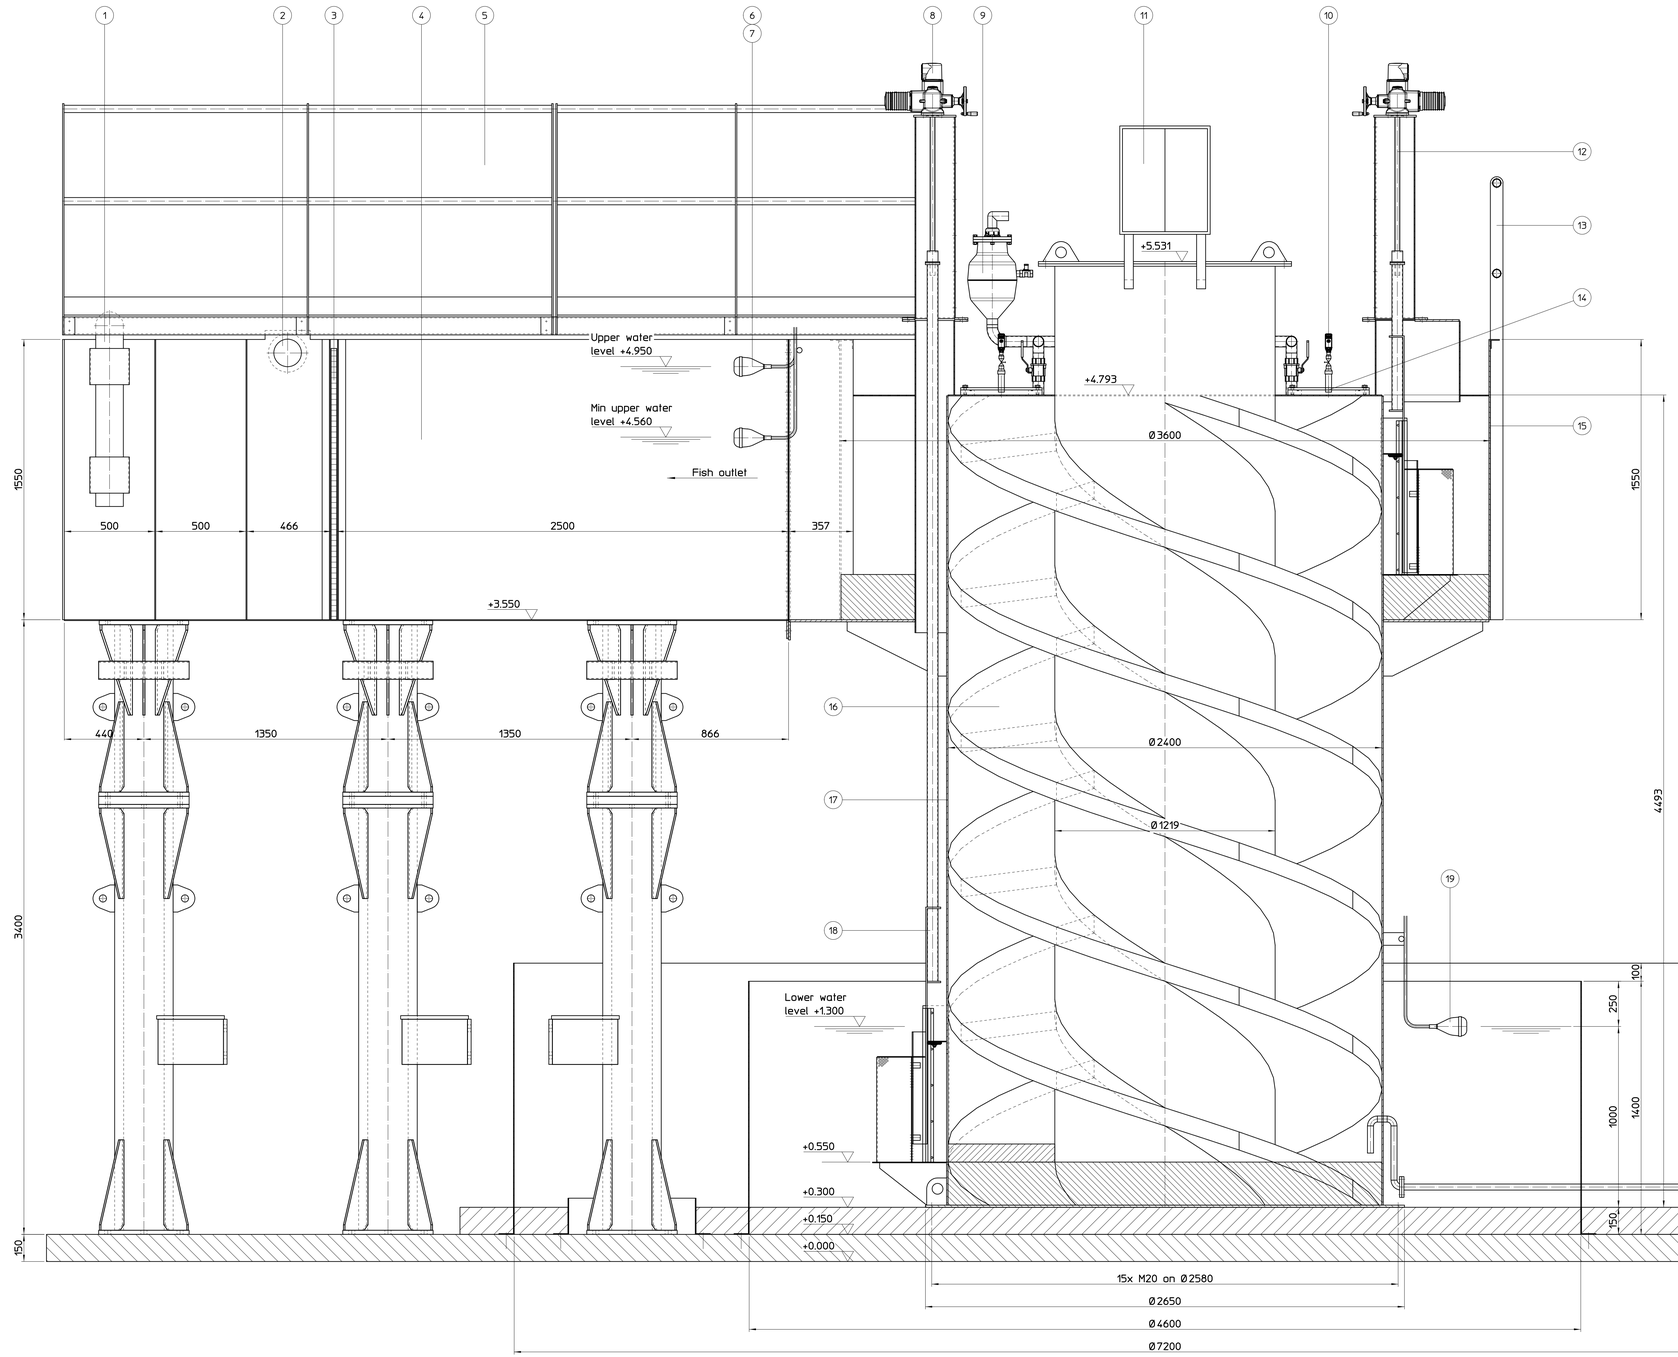


Posnr	Numb	Description	Material
1	1	Inlet tube from the submersible pump	Rubber
2	1	Overflow back to the inlettank	St 37-2
3	1	Press locked grating mesh spacing 30x30	Galvanized
4	1	Fish outlet channel 1,55x4,36x1,05 m	St 37-2
5	1	Access bridge - walkway width 1 m	St 37-2
6	1	Upper water level switch - off-switch of submersible pump	PP
		Tecnoplastic - type Taurus	
7	1	Low water level switch - on-switch of submersible pump	PP
		level= no air in the system - Tecnoplastic - type Taurus	
8	6	Multi-turn actuators for open-close duty AUMA	-
		type SAV 07.6-B12-120/ACV 01.2 - output speed 90 rpm - Pn= 0,20 kW	
		Max torque= 30 Nm - 3 ph - 380/480 V - IP 68 - 60 Hz	
9	1	Breather valve Hawle- type 986-00	Steel
		max working pressure 16 bar - DN 100 - PN 10/16	
10	3	Pressure sensor with display IFM type PN 2093 - range from -1 to 25 bar	AISI
11	1	Electrical control box	Plastic
12	3	Upper sluice gates - opening 300 mm width x 600 mm height	St 37-2
13	1	Handrail Ø48.3x2.9 mm	St 37-2
14	3	Airtight inspection covers	St 37-2
15	1	Outlettank Ø3.6x1,55 m - thickness 4 mm	St 37-2
16	1	Fish spiral screw Ø1.219x02.4 m	St 37-2
17	1	Housing for fish spiral screw Ø2,4x4,493 m - thickness 4 mm	St 37-2
18	3	Lower sluice gates - opening 300 mm width x 600 mm height	St 37-2
19	1	Low water level switch - off-switch of submersible pump	PP
		Tecnoplastic - type Taurus	
20	1	Water buffer tank	St 37-2
21	3	Pressure sensor with display IFM type PN 2093 - range from -1 to 25 bar	AISI

PROPOSED BY

VANDEZANDE

B.V.B.A. VANDEZANDE
Zeepziederijstraat 5
Postbus 62
B-8600 DIKSMUIDE
Tel. 051/50.01.17 ■ Fax. 051/50.41.17 ■ e-mail: info@vandezande.com

PROJECT

Prototype
Fish spiral sluice gate
Test stand - Front view

Rev.	Date	Modifications	Name
-	1-07-22	First edition	D.R.

Drawn by: D.R.
Checked: D.V.
Scale: 1:12.5
Date: 1/07/2022

Projektnr: 2022/17

Plannr: V-FISH / 01 / S01 _ Rev

This drawing is property of Vandezande bvba. It may not be reproduced nor handled to others without our written authorization.

filenr 2022/17 / V-FISH / 01 / S01 / A

sys.date 01/07/22